



HOME Pro

Single Universal 40mm PLL LNB
IDLP-SNL413-HMPRO-OPX

Item: 6540

Specifically designed to address the demand of the global DTH market for a competitive and 4G/LTE protected solution, this LNB provides optimized reception capabilities using the latest chipset technology and waveguide design for satellite signal reception. It enables the reception of satellite TV from a single satellite and its distribution to a single tuner Set-top box. The LNB supports HD and UHD transmissions, delivers excellent RF performances, very low power consumption and importantly engineered to mitigate interferences from 4G/LTE/5G transmissions. Manufactured to the highest industry quality standards and engineered to meet strict specifications, this LNB is an ideal solution for DTH operators and satellite broadcast reception across the world.

Main Features:

- Low Phase Noise, DVB-S2 (HD and UHD) compliant
- Low Noise Figure
- Low power consumption
- High Cross Polarization Isolation
- High Frequency stability



www.inverto.tv


HsSquare
Technology

←40→
mm


ULN
Low Noise
Technology

5G

4K/8K
Ultra HD

Technical data

Input frequency range	10.7 GHz ~ 12.75 GHz
Output frequency range	950 MHz ~ 2150 MHz
Low band LO frequency	9.75 GHz
High band LO frequency	10.6 GHz
Noise figure	0.4 dB typ. (1dB max.)
LO frequency accuracy @ 25 °C	±500 kHz max.
LO temperature drift	±1.0 MHz max.
LO phase noise @ 1 kHz	-60 dBc/Hz max.
LO phase noise @ 10 kHz	-80 dBc/Hz max.
LO phase noise @ 100 kHz	-90 dBc/Hz max.
Conversion gain	58 ~ 65 dB
Gain ripple (over 26 MHz bandwidth)	±0.75 dB
Gain variation (over full band)	±3 dB
Image rejection	40 dB min.
3th order intermodulation - ICP3	10 dBm min.
1 dB compression point (@ output)	0 dBm min.
Cross polarization isolation	22 dB min.
Control signal Ca (V)	11.0 V ~ 14.0 V
Control signal Cb (H)	16.0 V ~ 20.0 V
Control signal Cc (band switching)	22 kHz ±4 kHz , 0.15 V ~ 0.35 V pp
Output VSWR	2.5 : 1
In band spurious level	-60 dBm max.
Current consumption	105 mA
Operating temperature	-30 °C ~ +60 °C
Output impedance	75 Ω
Output connector type	F-type (female)
Dish F/D ratio	0.6
Weight	66 g

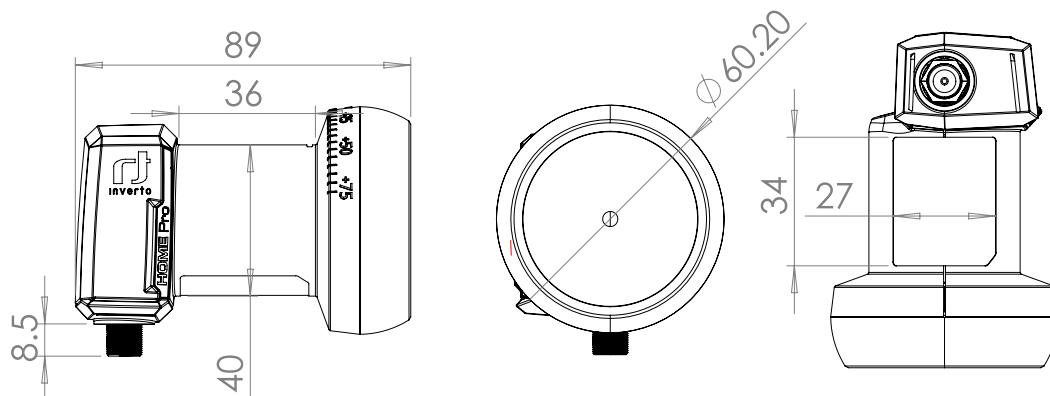

For purpose of brevity, some product descriptions in this sheet remain at platform level and may not be referred to as detailed datasheets of the products. Inverto Digital Labs reserves the right to amend, omit or add products, product-lines, and / or features without notice.

For further details contact: sales@inverto.tv
 FTA Communication Technologies S.à r.l. Tel. +352 264 367 1 Fax. +352 264 313 68
 17 Route de Luxembourg, Gonderange, L-6182, Luxembourg